





1. put down the screw (2), put down windproof cover (1).
2. put down the flange bolt (4), put down the cross bolt (3)

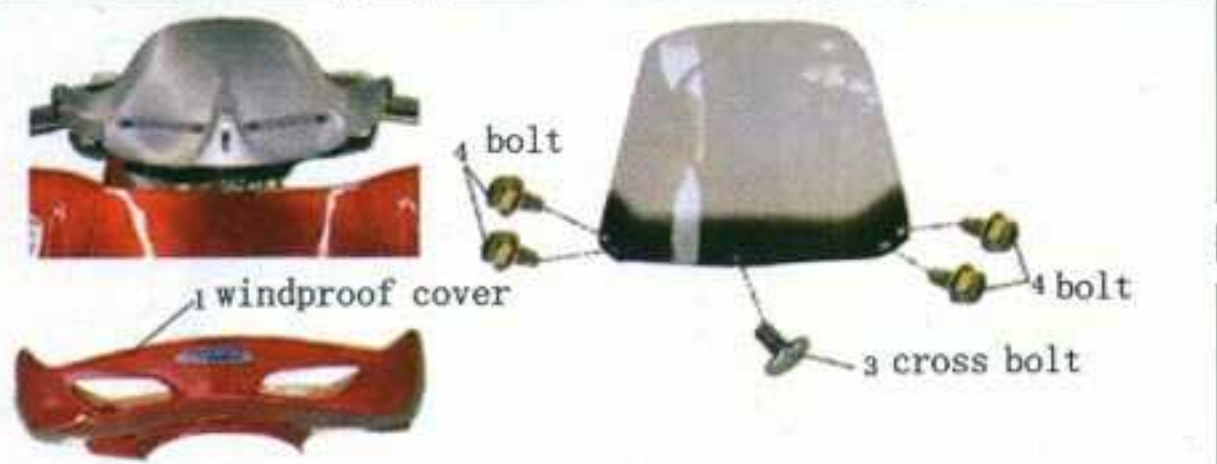

2 screw 2 screw
screw 2 2 screw
3. use flange bolt (4) and cross bolt (3) to fix the windproof mirror on the place.
4. use screw (2) to fix windproof cover well.

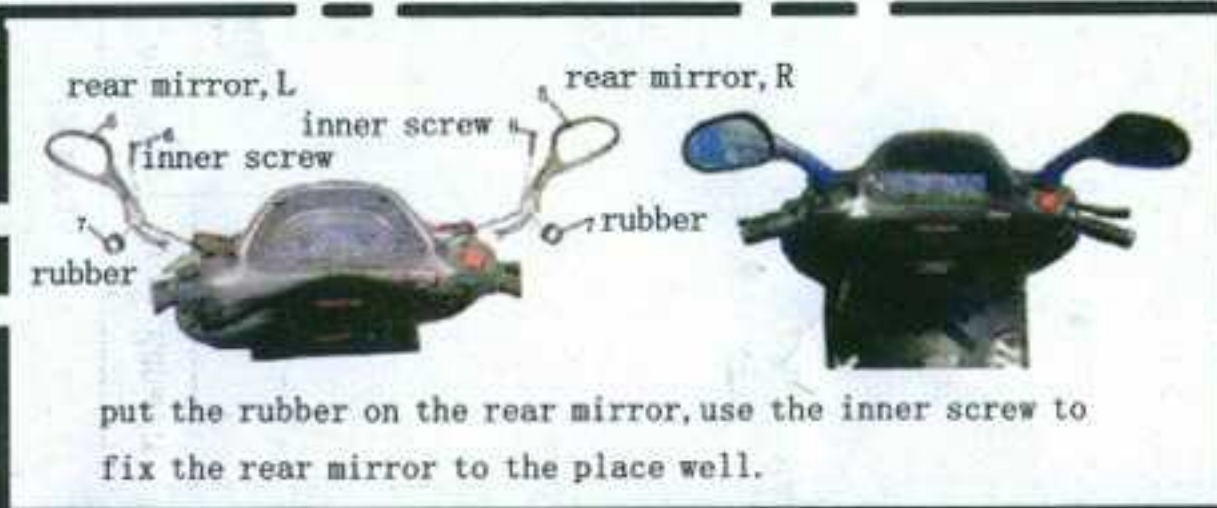

put the rubber on the rear mirror, use the inner screw to fix the rear mirror to the place well.

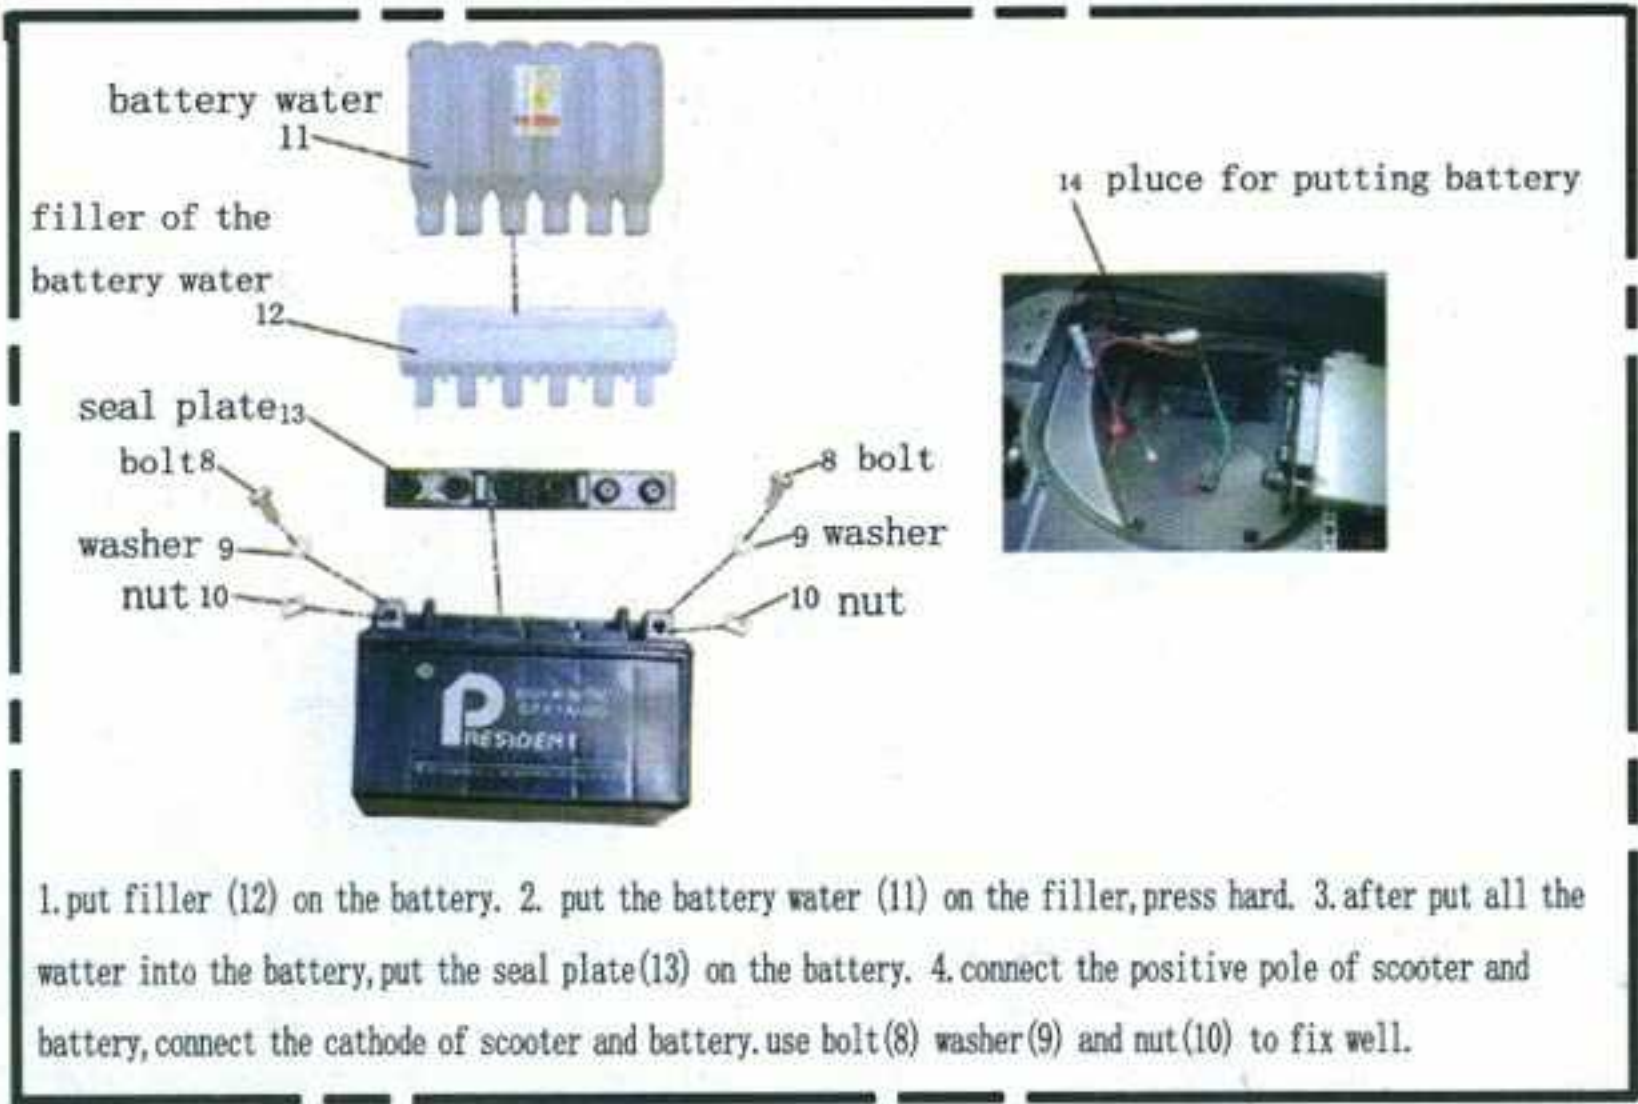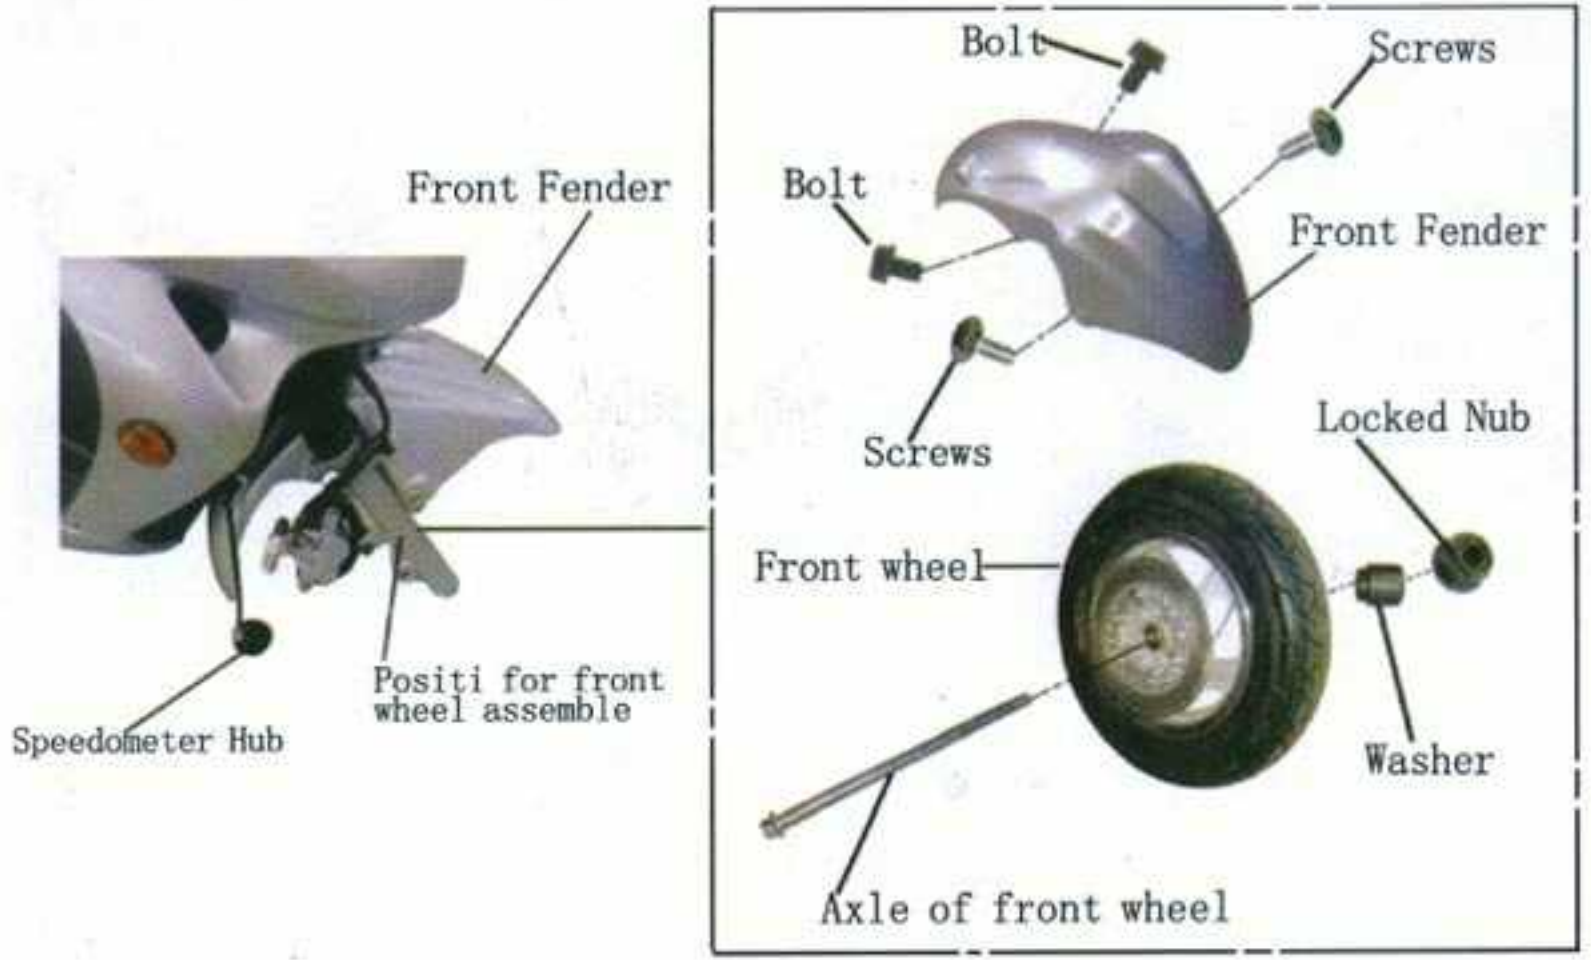

1. put filler (12) on the battery. 2. put the battery water (11) on the filler, press hard. 3. after put all the watter into the battery, put the seal plate (13) on the battery. 4. connect the positive pole of scooter and battery, connect the cathode of scooter and battery. use bolt (8) washer (9) and nut (10) to fix well.